



Elevator Controller

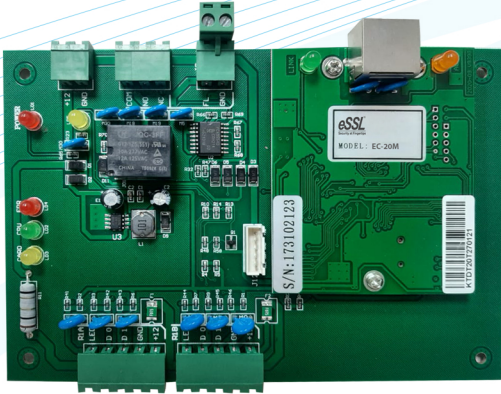

EC-20M

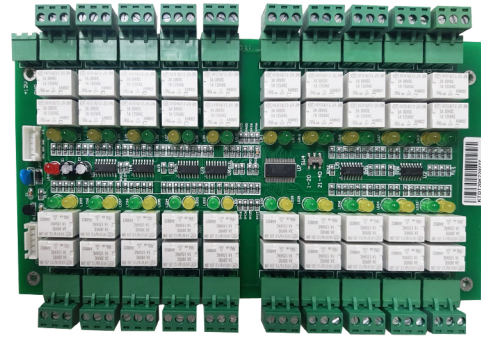

EC-20K


Extension Board

Specification

Control floors : 20 floors
 Card qty supported : 20,000 cards
 Storage : 100,000 records
 (records kept even power off)
 Communication method : TCP/IP
 Input : one reader or
 other biometric devices
 with wiegand 26 bits/34 bits
 PCB size : 164*106mm
 Fire signal input: 1 line
 Power supply : DC 12V (Professional
 access power supply of item
 DY12 is recommended)
 Supporting software : working with eSSL access
 management software, all-in-one solutions
 (access control, Elevator, etc.)

EC-20K

Support with EC20M elevator controller,
 one EC-20M elevator controller mostly can
 work with 2 EC-20K Extension Board
 Output : 20 lines for each extension board
 PCB Board size : 219*115mm
 Supporting software : working with eSSL access
 management software, all-in-one solutions
 (access control, Elevator, etc.)

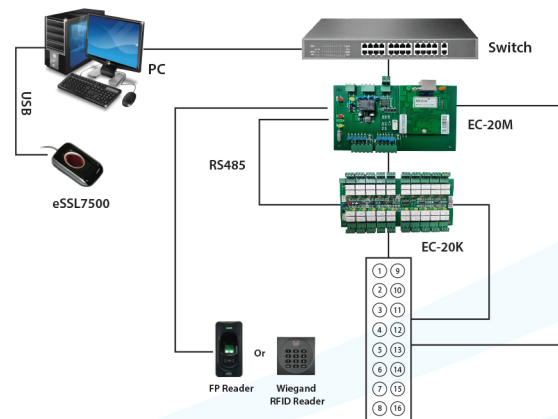

Disclaimer: Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development