




Multidoor Access Control - 2 Door

inBio 260

Specification

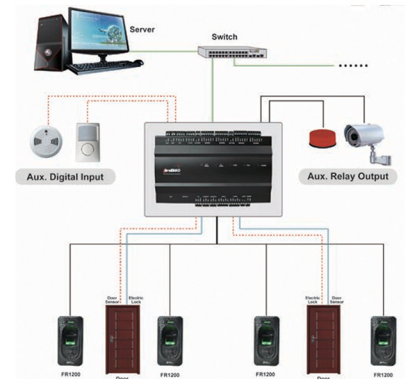

Number of doors controller : 2 Door
Numbers of readers supported : 8(4 RS-485 Reader, 26-bit wiegand reader)
Types of readers supported : 26-bit Wiegand and RS485 FR Series Reader
Number of Inputs : 6(2 Exit Device, 2 Door Status, 2 AUX)
Number of Outputs : 4 (2-Form C Relay for Lock and 2-Form C Relay for Aux Output)
Card holders Capacity : 30,000
Fingerprint Capacity : 3,000
Log Events Capacity : 100,000
Communication : TCP/IP and RS-485
Package Dimension : 350(L)×90(H)×300(W)mm
Package Weight : 3.6kg
CPU : 32 bit 400MHz CPU
RAM : 32M
Flash Memory : 128M
Power : 9.6V-14.4V DC
Operating Temp : 0 - 45 °C
Operating Humidity : 20% to 80%

Software and Database Supported :

- (1) Biosecurity 3.1.0.0(Web Version)
database:- PGSQL / MS SQL
- (2) Access Security System 3.5 (Desktop Version)
Database Type:- MS Access / MS SQL

Features:

- Embedded Fingerprint verification and advance access control function
- It can be installed easily on your network also support TCP/IP and RS485 communication
- 1/2/4 Door models can be mixed and matched in an optimised System Architecture
- Data is preserved if power is lost, Controller continues to operate if data connection is interrupted
- Anti-Passback, Interlock, First-Card Opening, Multi-Card Opening
- Duress Password Entry, and Auxiliary input/output linkages are inbuilt into controller firmware